


# Autoslide Re-handing instructions




# Autoslide Re-handing instructions

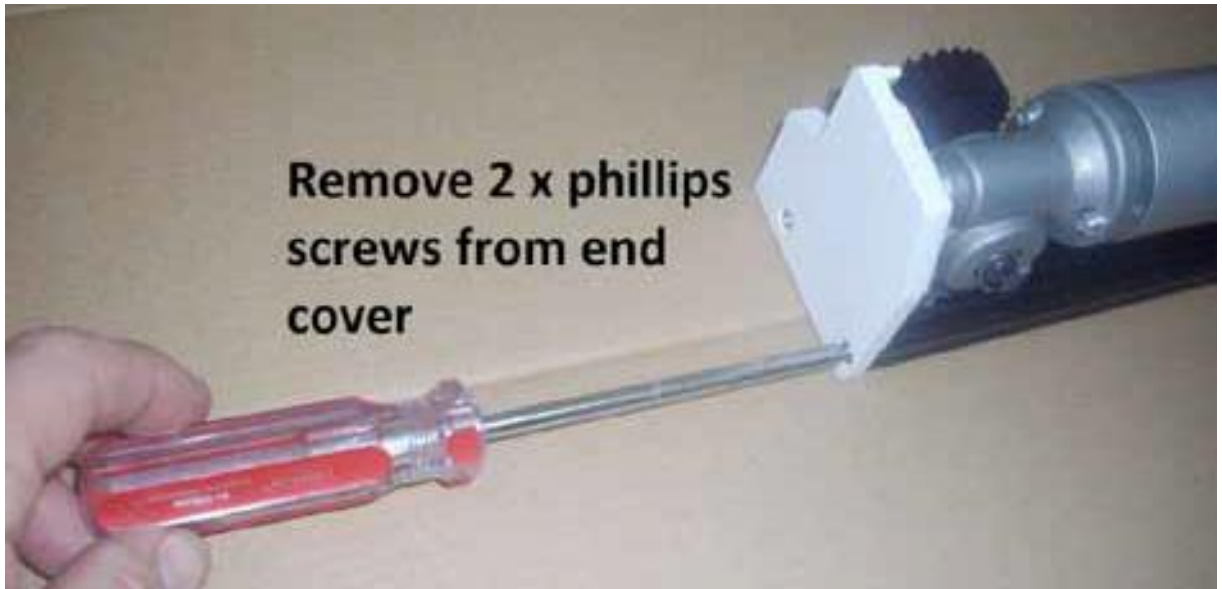

# Autoslide Re-handing instructions



# Autoslide Re-handling instructions

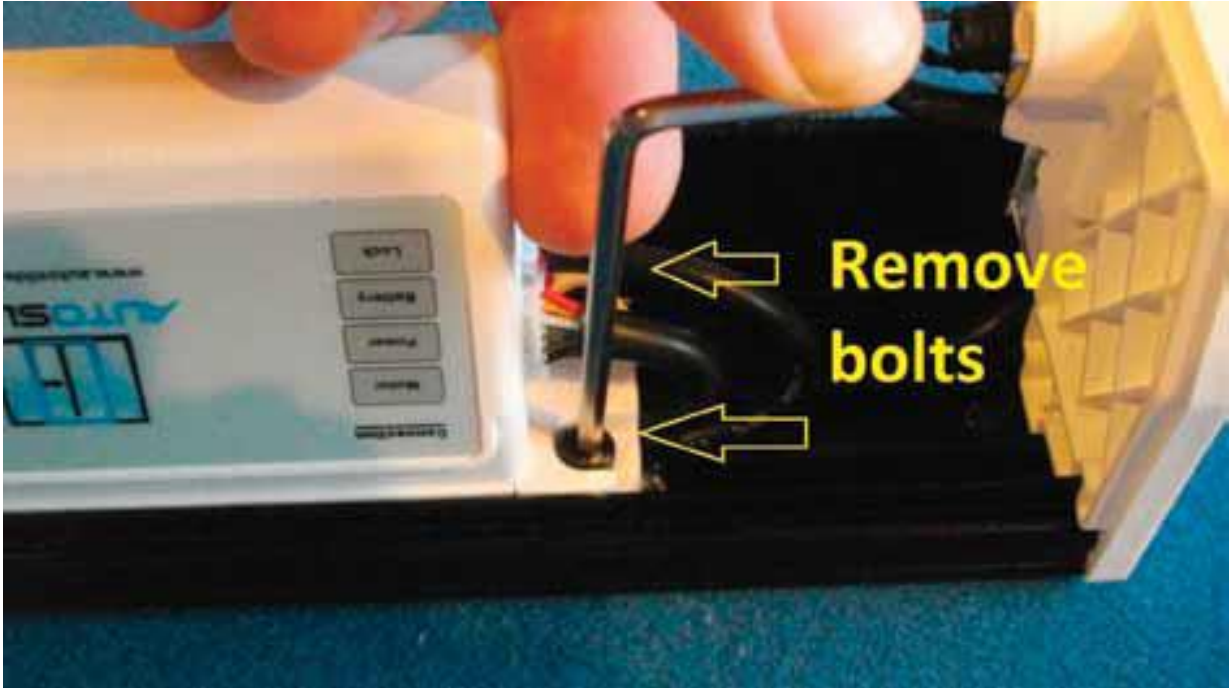

# Autoslide Re-handling instructions


**Slide metal bars to the left**




**Place power cable in extruded recessed area.**



# Autoslide Re-handling instructions

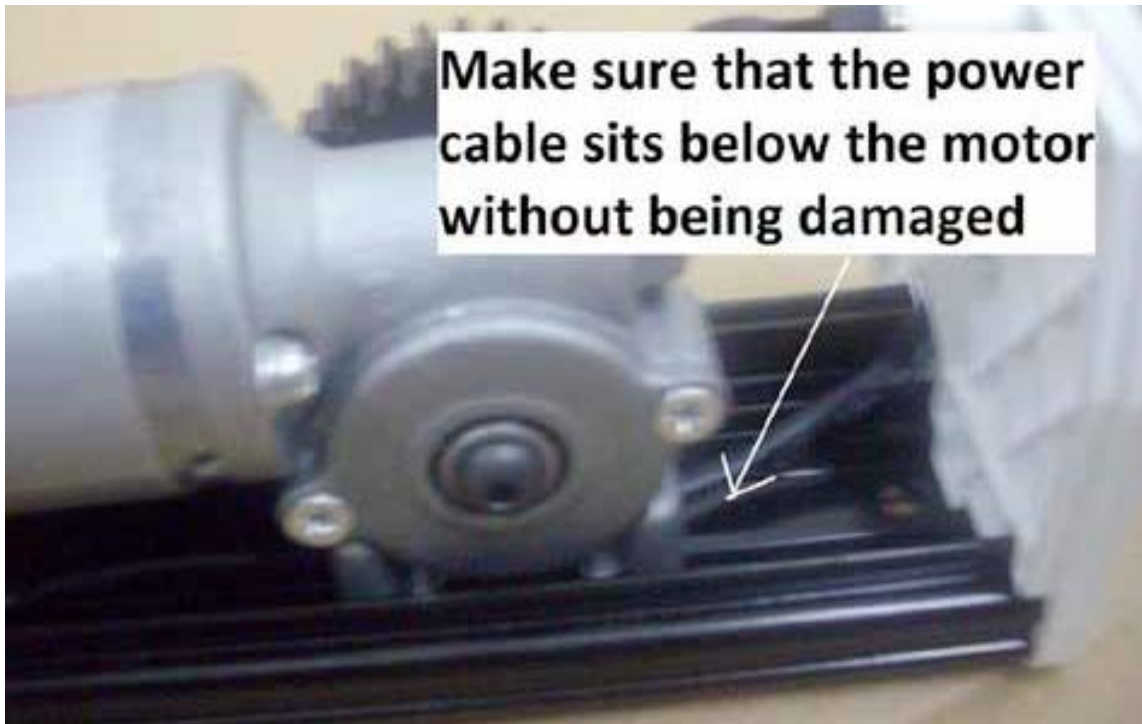

# Autoslide Re-handling instructions

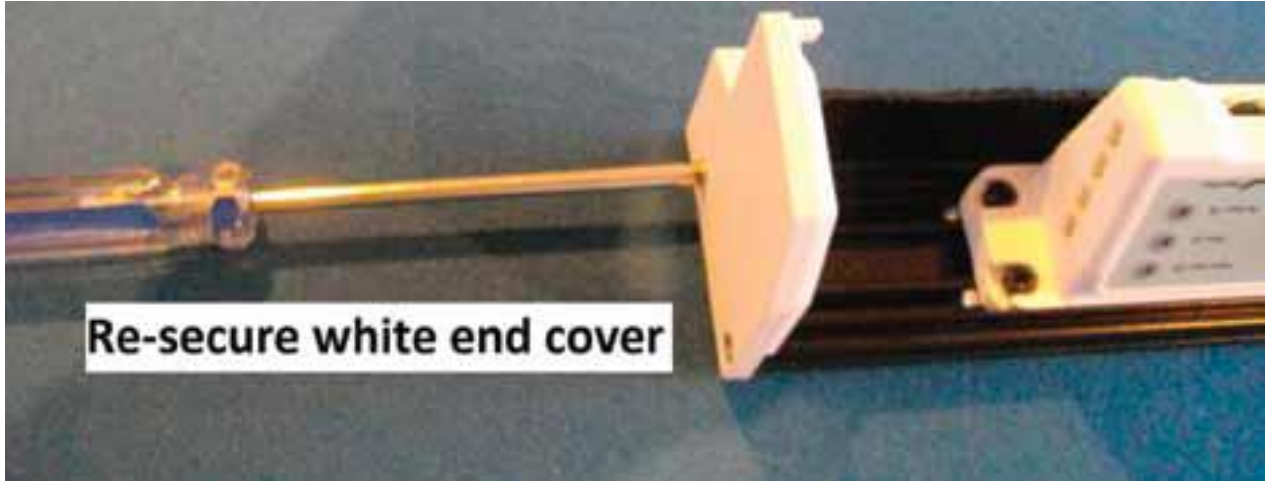

# Autoslide Re-handling instructions

Aligning the mode control feature to the cut in the autoslide cover may require some slight adjustments, left or right movement. Loosen the 4 x allen key bolts holding the control unit to the black extrusion and adjust control unit to fit evenly while autoslide cover is on. Once in correct position re-tighten allen key bolts and also check that the motor bolts are secured



Mode control feature